


The Catering Equipment Company



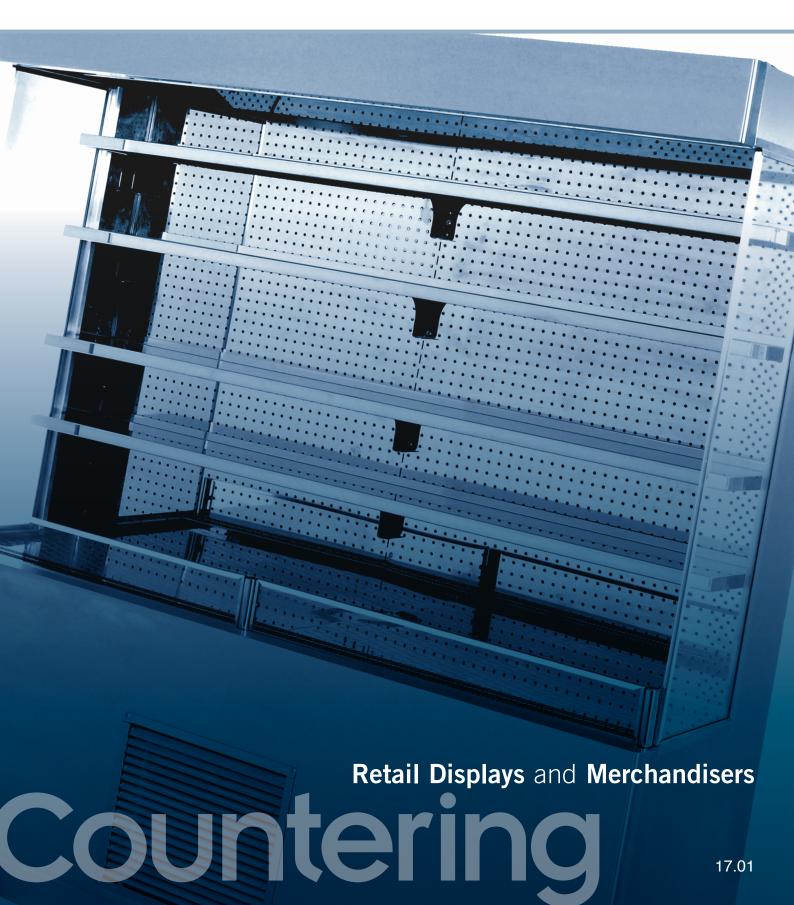

Merchandisers

This modern, clean line styled, exclusive range of free standing mobile display units offer five levels of display maximising food product display within the minimum footprint.

Ideal for today's Grab and Go type retail and convenience store outlets. Matching ambient and chilled units provide the perfect display area for product merchandising in onsite catering installations or as part of high street food takeaway stations.

The self contained display units with an open design increased product visibility and accessibility.

The robust shelves are adjustable for height allowing flexibility regarding the types of products being displayed.

Complete with castors for easy installation as well as providing an easy means of moving the unit for cleaning.

Samples of our Standard Colour Coated Steel Finishes



Academy Maple



Stainless Steel



American Natural



Mahogany







Note: These models are also available with the option of a square top canopy combined with built-in lockable roller shutter. Shutters are supplied in white finish only, if coloured shutters are required these are priced on an individual basis. See LSA codes below and price list for details.



Free-Flow Grab & Go





Function:

- Presenting both hot and cold food in complementary displays
- Offering a complete meal deal within a small foot print
- Displays pre-heated and pre-chilled food at regulated temperatures

Controls:

- Accurate digital controls ensure consistant air flow both hot and cold
- Hot food maintained at 65°c to 75°c, chilled maintained at 2°c to 5°c
- Independent illumination on / off switches
- Internal refrigeration condensate self-evaporation system



MHC1 Heated

Function:

- Perfect for holding paninis, pasties, soup etc.
- Displays pre-heated food at regulated temperatures

Controls:

- Accurate, digital controls concealed behind hinged flap
- Hot food maintained at 65°c to 75°c
- Independent illumination on / off switch



MC1 Chilled

Function:

- Perfect for sandwiches, filled rolls, dairy products, and drinks etc.
- Displays pre-chilled food at regulated temperatures

Controls:

- Accurate, digital controls concealed behind hinged flap
- Gental air-flow system maintains food in a fresh condition
- Displayed products maintained at 2°c to 5°c
- Independent illumination on / off switch
- Internal condensate selfevaporation system

NEW



MA1 Ambient

Function:

- Complimentary ambient display cabinet
- Ideal for confectionary, biscuits, doughnuts and crisps etc.

Controls:

 LED light switch concealed behind hinged flap



- Mobile with front brakes allow stress-free maintenance and cleaning
- Ergonomic handles at the rear for easy manoeuvrability
- Constructed from 304 and 430 grade bright polished stainless steel
- All glass 6mm toughened
- High-grade insulation improves temperature retention
- Coated evaporator coils provide longer life and hygiene



MODEL	MHC1	MHC1D	MH1	MH1D	MC1	MC1D	MA1	MA1D
Weight kg	145	155	102	112	136	146	97	107
Length mm Height mm Depth mm	650 1825 680	650 1825 680	650 1825 680	650 1825 680	650 1825 680	650 1825 680	650 1825 680	650 1825 680
Capacity (m³)	2 x Heated/0.06 3 x Chilled/0.08		4 x Heated/0.14	4 x Heated/0.14	5 x Chilled/0.14	4 x Chilled/0.14	4 x Ambient/0.14	4 x Ambient/0.14
Power rating kw	2.8	2.8	2.8	2.8	2.2	2.2	0.15	0.15







Chilled Merchandisers

The merchandiser has a refrigerated well with recirculating cold air which cascades down the front and over the shelves to ensure even temperatures of 2°C-8°C. The compact unit makes maximum use of space to display large quantities of chilled food and drinks in a self-service environment. Ticket holders for front of shelf and night blind are available. Please note if these units are to be used for overnight storage it is essential that a night blind is fitted, failure to do this may invalidate the warranty.

Chilled Multi Tier Display

Models MM9, MM12, MM15, MM18

Chilled Multi Tier Display units are designed for self service, holding pre-chilled food at regulated serving temperatures suitable for the display of most types of cold foods. Complete with an inset well and four adjustable shelves for increased product display, a gentle flow of cold air flows through the cabinet maintaining a safe and compliant temperature within.

The thermostatically controlled Chilled well has an automatic defrost as well as an automatic condensate water evaporation system eliminating the need to manually empty drip trays or install onsite drainage.

The accurate digital display controls are housed conveniently within the top of the unit for easy access.

Complete with illumination for increased food presentation.

All Chilled merchandisers are supplied with a 2 meter long cord set with moulded 13 amp plug for easy installation. (13A 230V 50Hz).

The refrigeration condensing unit and compressor are house within the base of the unit which is open at the rear for easy maintenance.

The condensing unit has a removable door vent for easy cleaning.

All model use CFC free R404A refrigeration gas.

Optional roller night blind to aid 24 hour operation.

Complete with all swivel castors two with brakes.

A slide on kick plate conceals the castors when the unit is in position.







Note: These models are also available with the option of a square top canopy combined with built-in lockable roller shutter. Shutters are supplied in white finish only, if coloured shutters are required these are priced on an individual basis. See LSA codes below and price list for details.

MODEL
Weight kg
Length mm Height mm Depth mm
Gas weight kg (R404A)
Electrical supply Single phase

Power rating kw

мм9	MM12	MM15	MM18
175	230	285	345
900 1950 700	1200 1950 700	1500 1950 700	1800 1950 700
0.8	0.8	0.8	0.8
13 amp 230v	13 amp 230v	13 amp 230v	13 amp 230v
2.7	2.7	2.7	2.7

MM9LSA	MM12LSA	MM15LSA	MM18LSA
Units with built-i	n lockable roller sh	outter	
175	230	285	345
900	1200	1500	1800
1950	1950	1950	1950
700	700	700	700
0.8	0.8	0.8	0.8
13 amp	13 amp	13 amp	13 amp
230v	230v	230v	230v
2.7	2.7	2.7	2.7

5





Ambient Merchandiser

- Ideal for confectionery, crisp snacks and fruit etc
- Designed to compliment chilled range of merchandisers
- Complete with Four robust adjustable for height stainless steel shelves
- Fitted with castors as standard for mobility easy cleaning etc.
- Illumination for increased product display
- Open design for increased product visability
- To be used between two merchandisers only

Note: The AM5 and AM5LSA can be purchased in conjunction with the Chilled Merchandisers but should not be used in isolation for stability reasons.

Note.

- Do not install units in draughty conditions where the air movement is greater than 0.2mtr/sec. (For example near entrance/exit doors, open windows, under air conditioning units or a ceiling mounted fan).
- Do not install units where there is high solar radiated heat [for example direct sunlight, room heaters, or bright spot lights.
- When loading refrigerated display units for best performance and refrigeration efficiency a gap should be left between the products allowing the cold air to pass through and recalculate.

Warning: The condensing coil must be kept free from dust and must be cleaned regularly to maintain the performance of the unit. Air borne particles can choke the fins of the condensing coil. The coil should be cleaned with a soft brush to loosen the dust then vacuum cleaned to remove it

Important: To obtain the maximum performance and efficiency from these units it is imperative that the ambient room conditions do not exceed a temperature of 25° or exceed a relative room humidity of 60%

AM5	AM5LSA	
125	135	
500 1950 700	500 2060 700	
_	-	
13 amp 230v	13 amp 230v	
0.026	0.026	

VI.	U	U	Ŀ	L	

Weight kg

Length mm Height mm Depth mm

Gas weight kg (R404A)

Electrical supply Single phase

Power rating kw



Grab & Go

Heated Table-top Multi Tier Display



- Designed to keep pre-cooked food at serving temperature and are suitable for the display of most types of hot foods,
- Ideal for Panini's Toasties Hot-Rolls Pies Pasties and chicken portions etc
- A gentle flow of warm air flows through the cabinet maintaining a safe and compliant temperature within.
- Aesthetic full height double glazed sliding doors are fitted at the operator's side.
- The smooth running sliding doors allow for easy loading, doing away with the predicament of blocking passageways that swing out hinged type doors are associated with.
- The accurate digital display controls are housed conveniently within the cabinet hood for easy access..
- Optional toughened front glass screen for assisted service
- Fitted with three removable rod shelves for easy cleaning
- The quartz heated illuminated cabinet for increased heat and food presentation.
- All units below 3 kw are supplied with a 2 meter long cord set with moulded 13 amp plug for easy installation.[13A 230V 50Hz]





Ambient Table-top units

- Designed for high product visibility
- Aesthetic full height double glazed sliding doors are fitted at the operator's side.
- The smooth running sliding doors allow for easy loading, doing away with the predicament of blocking passageways that swing out hinged type doors are associated with.
- Optional toughened front glass screen for assisted service
- Fitted with three removable rod shelves for easy cleaning
- Illuminated cabinet for increased product presentation.
- All units below 3 kw are supplied with a 2 meter long cord set with moulded 13 amp plug for easy installation. [13A 230V 50Hz]

Back to Wall models Heated and Ambient

These units have front controls and a fully insulated bright polished stainless steel back panel.

MODEL

Weight kg
Length mm Height mm Depth mm
No. of 200w Quartz Lights
Electrical supply Single phase
Power rating kw

Heated Displays				
GGHT2	GGHT3	GGBHT2 Back to wall model	GGBHT3 Back to wall model	
66	87	60	81	
830 825 660	1158 825 660	830 825 660	1158 825 660	
2	3	2	3	
13 amp 230v	13 amp 230v	13 amp 230v	13 amp 230v	
2.7	2.8	2.7	2.8	

See price list for detailed specification

Ambient Displays				
GGAT2	GGAT3	GGBAT2 Back to wall model	GGBAT3 Back to wall model	
61	82	55	76	
830 825 660	1158 825 660	830 825 660	1158 825 660	
	-			
13 amp 230v	13 amp 230v	13 amp 230v	13 amp 230v	
0.026	0.026	0.026	0.026	

7

Chilled Free-standing Multi Tier display

- · Designed to maintain pre-chilled food at a regulated temperature
- · Ideal for sandwiches filled rolls dairy products drinks etc
- A gentle flow of cold air flows through the cabinet maintaining a safe and compliant temperature within.
- Aesthetic full height double glazed sliding doors are fitted at the operator's side.
- The smooth running sliding doors allow for easy loading, doing away with the predicament of blocking passageways that swing out hinged type doors are associated with.
- The accurate digital display controls are housed conveniently within the cabinet hood for easy access..
- Fully enclosed for assisted service featuring a toughened front curved glass screen
- Fitted with three removable toughened glass shelves for easy cleaning
- LED illuminated cabinet for increased food presentation.
- All units below 3 kw are supplied with a 2 meter long cord set with moulded 13 amp plug for easy installation. [13A 230V
- · Optional castors providing unit mobility



Heated Free-standing Multi Tier display

- · Designed to keep pre-cooked food at serving temperature and are suitable for the display of most types of hot foods,
- Ideal for Panini's Toasties Hot-Rolls Pies Pasties and chicken portions etc
- A gentle flow of warm air flows through the cabinet maintaining a safe and compliant temperature within.
- Aesthetic full height double glazed sliding doors are fitted at the operator's side.
- The smooth running sliding doors allow for easy loading, doing away with the predicament of blocking passageways that swing out hinged type doors are associated with.
- · The accurate digital display controls are housed conveniently within the cabinet hood for easy access..
- Optional toughened front glass screen for assisted service
- Fitted with three removable rod shelves for easy cleaning
- The quartz heated illuminated cabinet for increased heat and food presentation.
- · All units below 3 kw are supplied with a 2 meter long cord set with moulded 13 amp plug for easy installation.[13A 230V 50Hz1
- · Optional castors providing unit mobility





Ambient Free-standing units

- · Designed for high product visibility
- Aesthetic full height double glazed sliding doors are fitted at the operator's side.
- The smooth running sliding doors allow for easy loading, doing away with the predicament of blocking passageways that swing out hinged type doors are
- Optional toughened front glass screen for assisted service
- · Fitted with three removable rod shelves for easy cleaning
- Illuminated cabinet for increased product presentation.
- All units below 3 kw are supplied with a 2 meter long cord set with moulded 13 amp plug for easy installation.[13A 230V 50Hz]

Optional castors providing unit mobility

Warning: The condensing coil must be kept free from dust and must be cleaned regularly to maintain the performance of the unit. Air borne particles can choke the fins of the condensing coil. The coil should be cleaned with a soft brush to loosen the dust then vacuum cleaned to

Important: To obtain the maximum performance and efficiency from these units it is imperative that the ambient room conditions do not exceed a temperature of 25° or exceed a relative room humidity of 60%

- Do not install units in draughty conditions where the air movement is greater than 0.2mtr/sec. (For example near entrance/exit doors, open windows, under air conditioning units or a ceiling mounted fan).
- Do not install units where there is high solar radiated heat [for example direct sunlight, room heaters, or bright spot lights.
- When loading refrigerated display units for best performance and refrigeration efficiency a gap should be left between the products allowing the cold air to pass through and recalculate

100	150
830 1650 660	1158 1650 660
-	-
13 amp 230v	13 amp 230v
2.0	2.0

GGCFS2

GGCFS3	GGHFS2	GGHFS3
150	91	127
1158 1650 660	830 1650 660	1158 1650 660
-	2	3
13 amp 230v	13 amp 230v	13 amp 230v
2.0	2.7	2.8

GGAFS2	GGAFS3
86	122
830 1650 660	1158 1650 660
-	-
13 amp 230v	13 amp 230v
0.026	0.026


MODEL	
Weight kg	
Length mm	
Height mm	
Depth mm	
No. of 200w Quart	z
_	
Electrical supply	
Electrical supply Single phase	
• • •	



Patisserie Range

Curved glass patisserie units to suite any bakery or deli outlet. These serve over hot and cold food display cabinets are Ideal for the display of pastries and sweets. Perfect for cafes and restaurants that wish to display their food, great for drinks and sandwiches.

- Made from durable bright finish stainless steel throughout with a aesthetic curved front glass screen and fully adjustable shelves
- Product display on four levels for maximum food merchandising
- Double glazed rear sliding doors allow easy access and loading
- Available in two sizes these modern designed display cabinets use a fully automatic controlled operation, keeping food chilled / hot at the required temperature
- These are versatile easy to clean compact display units which are excellent for keeping food fresh.



- Designed to keep pre-cooked food at serving temperature and are suitable for the display of most types of hot foods,
- Ideal for Paninis, Toasties, Hot-Rolls, Pies, Pasties and chicken portions etc
- A gentle flow of warm air flows through the cabinet maintaining a safe and compliant temperature within.
- Aesthetic full height double glazed sliding doors are fitted at the operator's side.
- The smooth running sliding doors allow for easy loading, doing away with the predicament of blocking passageways that swing out hinged type doors are associated with.
- The accurate digital display controls are housed conveniently within the cabinet hood for easy access...
- Fully enclosed for assisted service featuring a toughened front curved glass screen
- · Fitted with three removable rod shelves for easy cleaning
- Quartz heated illuminated cabinet for increased heat and food presentation.
- All units below 3 kw are supplied with a 2 meter long cord set with moulded 13 amp plug for easy installation. [13A 230V





MODE
Weight ke
Length mn
Height mn
Depth mn
No. of 200v
Quartz Lights
Electrical supply
Power rating kv

PATHZ	PATH3
82	122
900 1370 800	1200 1370 800
2	3
13 amp 230v	13 amp 230v
2.7	2.8





Chilled Multi Tier Display

- Designed to maintain pre-chilled food at a regulated temperature
- · Ideal for sandwiches filled rolls dairy products drinks etc
- A gentle flow of cold air flows through the cabinet maintaining a safe and compliant temperature within.
- Aesthetic full height double glazed sliding doors are fitted at the operator's side.
- The smooth running sliding doors allow for easy loading, doing away with the
 predicament of blocking passageways that swing out hinged type doors are
 associated with.
- The accurate digital display controls are housed conveniently within the cabinet hood for easy access..
- Fully enclosed for assisted service featuring a toughened front curved glass screen
- Fitted with three removable toughened glass shelves for easy cleaning
- LED illuminated cabinet for increased food presentation.
- All units below 3 kw are supplied with a 2 meter long cord set with moulded 13 amp plug for easy installation.[13A 230V

Note:

- Do not install units in draughty conditions where the air movement is greater than 0.2mtr/sec. (For example near entrance/exit doors, open windows, under air conditioning units or a ceiling mounted fan).
- Do not install units where there is high solar radiated heat [for example direct sunlight, room heaters, or bright spot lights.
- When loading refrigerated display units for best performance and refrigeration efficiency a gap should be left between the products allowing the cold air to pass through and recalculate.



Ambient Multi Tier Display

- Option of either open front for self service or fully enclosed for assisted service
- Ideal for confectionery, crisps nuts breads and fruits
 ofc
- Fitted with three removable rod shelves for easy cleaning
- Optional full height double glazed sliding doors fitted at the operator's side.
- LED illuminated cabinet for increased food presentation.
- All units below 3 kw are supplied with a 2 meter long cord set with moulded 13 amp plug for easy installation.[13A 230V

PATC2	PATC3
121	184
900 1370 800	1200 1370 800
13 amp 230v	13 amp 230v
2.2	2.2

Warning: The condensing coil must be kept free from dust and must be cleaned regularly to maintain the performance of the unit. Air borne particles can choke the fins of the condensing coil. The coil should be cleaned with a soft brush to loosen the dust then vacuum cleaned to remove it

Important: To obtain the maximum performance and efficiency from these units it is imperative that the ambient room conditions do not exceed a temperature of 25° or exceed a relative room humidity of 60%

PATA2	PATA3
96	132
900 1370 800	1200 1370 800
13 amp 230v	13 amp 230v
0.026	0.026

MODEL
Weight kg
Length mm Height mm Depth mm
Electrical supply Single phase
Power rating kw



BK Retail Display

If you want to expand your food operations in a retail environment such as a bakery or a snack bar, the BK Retail Display range from E&R Moffat is an ideal choice. It provides a range of attractive, highly-functional display units that show your food at its best and make the most of the space available. The glass-fronted units are light and airy, so your customers can see the food clearly, they are also easy to clean and maintain. A variety of decorative front panels in a range of colours or patterned stainless steel is available.





Rear view of BK9A

Rear view of BK9H





BK Ambient Display

Model BK9A, BK12A, BK15A, BK18A

Modular ambient units designed to complement the hot and cold displays. These rigidly constructed units can be used to display a wide variety of food products. Solid stainless steel bottom shelf with perforated top and mid shelves. Food display is enhanced with internal illumination. Forward tilting front glass panel for easy cleaning. Open undershelf to rear. Optional front of shelf name or price tag holders.

BK Heated Display

Model BK9H, BK12H, BK15H, BK18H

Stylish modular units display hot food with maximum impact. Bottom shelf inset with toughened highly efficient thermo panels with built in heating elements ensuring evenly distributed heat over the full area. Quartz heated and illuminated top and mid shelves. Forward tilting front glass panel for easy cleaning. Optional front of shelf name or price tag holders. Open undershelf to rear.

MODEL
Weight kg
Length mm Height mm Depth mm
Dower rating law

BK9A	BK12A	BK15A	BK18A
74	98	123	147
900 1310 800	1200 1310 800	1500 1310 800	1800 1310 800
0.042	0.063	0.063	0.063

вк9н	BK12H	BK15H	BK18H
81	109	135	165
900 1310 800	1200 1310 800	1500 1310 800	1800 1310 800
1	1.2	1.4	1.9



Rear view of BK9R

BKRW3




BK Roll Warming Drawer Model BKRW3

Designed to keep rolls, buns, pastries and other breads warm for extended periods of time, digital control for accurate temperature control with water reservoir to provide hunidity keeping food moist in a good condition. Three large removable, perforated insert drawers for easy cleaning. Heavy duty construction fully insulated for energy efficiency.

BK Refrigerated Display Model BK9R, BK12R, BK15R

Designed for optimum food display with all-round visibility. Ambient top shelf. Recirculating cold air ensures an even temperature of 2°C - 8°C on mid and bottom shelves. Perforated stainless steel shelves removable for easy cleaning. Optional front of shelf name or price tag holders are available. Forward tilting front glass panel for easy cleaning complete with factory set digital control with on/off switch. Independent illumination control.



Samples of our Standard Colour Coated Steel Finishes



Whilst every effort is made to represent the true colours of our panels these must be used as a guide only. True colour samples are available upon request.


M	0	D	E	L	


Weight kg

Length mm Height mm Depth mm

Power rating kw








Regeneration & Keep Hot



General Fabrication



Countering