

Induced Energy iSkillet



Product Specifications

Maximum Power 3.0KW

Electrical Supply 220V to 265V AC 50Hz and 60Hz 13 amp single phase supply

Cord & Plug Cord length 1.8m

Moulded 13-amp plug fitted (UK)

Appropriate plug for each export market

Weight 10kg

Dimensions (mm) 340 x 450 x 100mm

Construction Ceran top, all stainless steel case

Depth of Field Up to 30mm

Safety Features Griddle detection, over heat prevention and clean filter warning

User Interface 3 operating programmes 3kW, 2.4kW & Boost. Re-programmable, via security function.

Countdown timer with audible warnings at near completion and completion of cycle. Display panel: Warnings: Clean Filter, No Pan Present, Glass hot & Shut Down.

Controls Push Button Operation, Ergonomically designed soft touch raised buttons.

Cooling Clearance Front only required.


Bespoke Options Ceran top design – minimum quantity 50

Warranty 2 years parts and labour, excluding case and Ceran top

CE Approved

Induced Energy Ltd. Operates a continuous programme of product development and improvement. Product specifications may therefore be subject to change.

Induced Energy Ltd, Westminster Road, Brackley Northants, NN13 7EB Tel 01280 705 900 Email: sales@inducedenergy.com

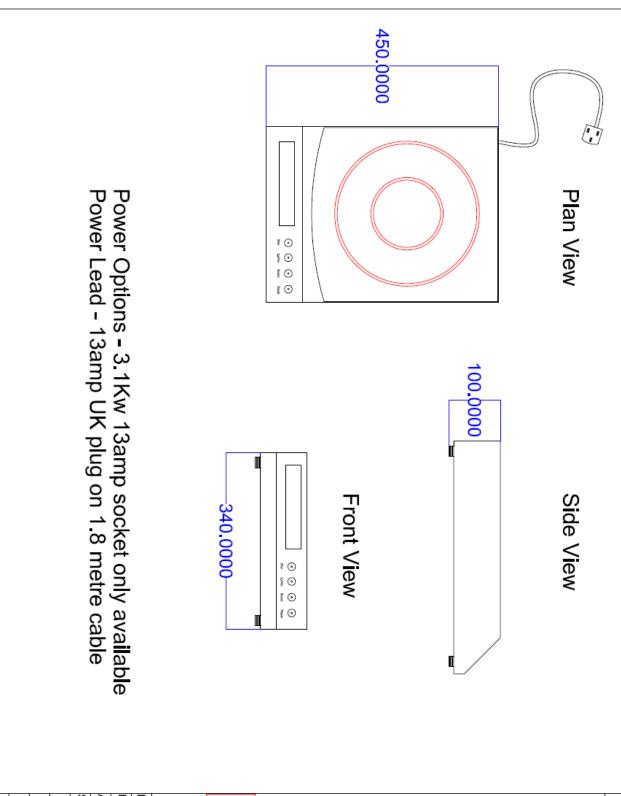

Signature Approved By | Nic Banner Date Revised | December 2016 Model No Skillet